

Uniquely creative, uniquely responsive to your needs.

KIOSK PRINTER

SK4-21/31

ENTRY CLASS KIOSK PRINTER

* SK4-21 (2 inch model) will be available soon.


Features

- Small and compact design
- Three ways of paper roll position support
- 150mm/sec speed printing
- A good balance of performance and cost
- LED Bezel option and Anti-Paper Jam Bezel option available
- Windows® Utility driver with Remote Status monitor function available



Head open design


【3 paper roll positions support】

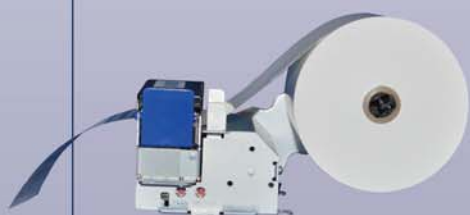

Rear position



Top position
(Paper dumper is required)

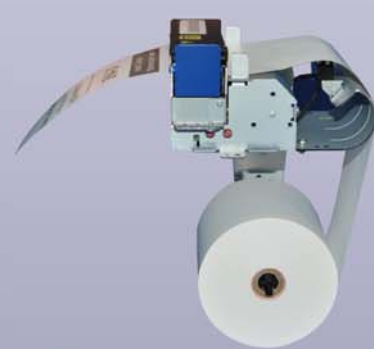

Bottom position
(Paper guide is required)



SK4-21/31


Features

- Small and compact design
- Three ways of paper position support
- 150mm/sec speed printing
- A good balance of performance and cost
- LED Bezel option and Anti-Paper Jam Bezel option available
- Windows® Utility driver with Remote Status monitor function available

Applications

- Self order Kiosk terminal
- Self check out Kiosk terminal
- Queue systems
- Vending machine

Options

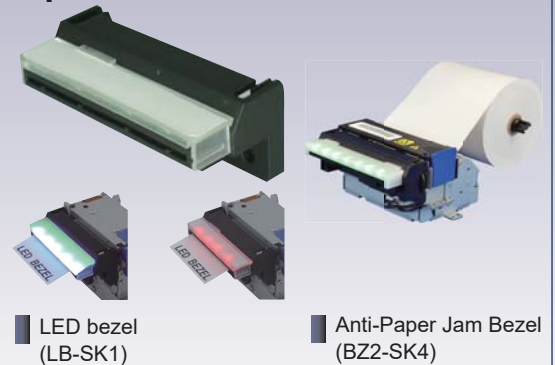

LED bezel
(LB-SK1)

Anti-Paper Jam Bezel
(BZ2-SK4)

Specifications	SK4-21	SK4-31
Printing method	Direct line thermal	
Resolution	8dots/mm(203dpi)	
Number of dots	Max 432 dots	Max 576 dots
Printing width	54mm	72mm
Paper width	58mm	80mm
Printing speed	Max. 150mm/sec.	
Paper style	Receipt paper	
Paper thickness	0.059 to 0.085mm (52g/m ² to 72g/m ²)	
Paper roll diameter	Max. φ 83mm	
Character font	8x16, 12x24 dots	
Barcodes	JAN8/13, CODE39, ITF, CODABAR, CODE128, UPC-A/E, QR Maxicode, PDF417, Micro PDF147, DataMatrix	
Paper sensor	Near end / Paper empty / Black mark	
Paper loading	Head open or Auto loading	
Auto cutter	Full cut or Partial cut (Command selectable)	
Interface	RS232C Serial + USB2.0	
Emulations	ESC/POST™ compatible	
Power supply	DC 24V±5% / TYP 2.7A	
Operating temperature	-5 to 50°C, 20%RH to 80%RH (No condensation)	
Storage temperature	-20 to +70°C, 10%RH to 90%RH (No condensation)	
Reliability	Print head : 100km, 100million pulses Auto cutter : 1,000,000 cuts (Specified paper)	
Safety standards	VCCI, FCC, CE CLASS A	
Overall dimensions (standard paper roll position)	86(W) x 150(D) x 81.7(H)mm	106(W) x 150(D) x 81.7(H)mm
Weight	Approx. 356g	Approx. 410g

*ESC/POS is a registered trademark of Seiko Epson Corporation.

*Windows® is a registered trademark of Microsoft Corporation in the United States and other countries.

*All specifications are subject to change without notice.

Distributed by



www.sanei-elec.co.jp

Headquarters :

2-51-13 Ikebukuro, Toshima-ku, Tokyo 171-0014, Japan
Phone: 81-3-3986-1188 Fax: 81-3-3988-5876



JQA-DM6336

JQA-EM498